


D44000WXA Paragon

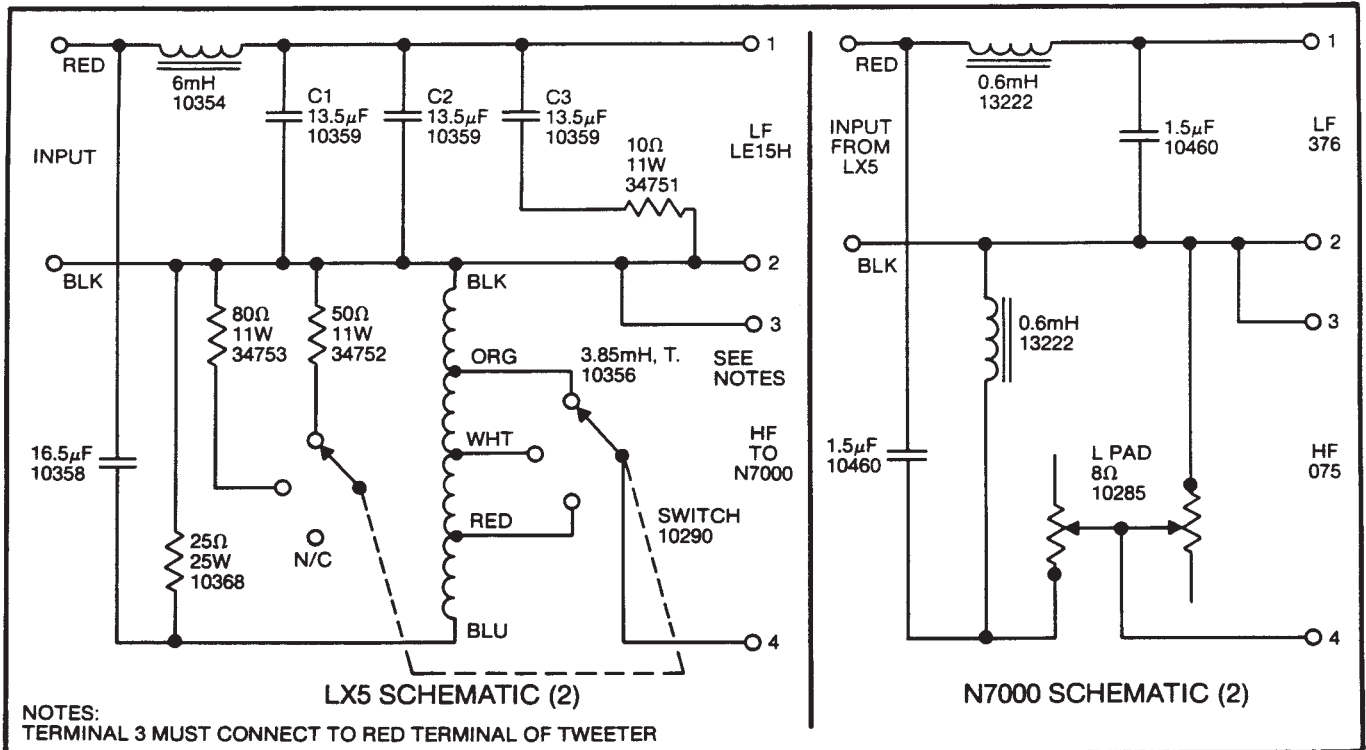

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:

LE15H (2)
Cone Kit: C8RLE15H
Nom. Impedance: 8 Ohm
Dynamic Test Input V: 10
Sweep Frequency Hz: 20-1200
D.C. Resistance Ohms: 8.0 min/9.6 max
Gap Gauge: .057"

Notes:

If Not Serviceable, Replace With: 2235H
Visual Change: Yes
Baffle Modification: No
Exact Acoustic Replacement: No. Use as last resort.
Replace both units in a stereo pair.

Additional Parts Currently Available*:

Dome: 50201
Mounting Gasket: 34499
Trim Gasket: 21058

MID RANGE DRIVER:

376 (2)
Diaphragm Kit: D16R2441
Nom. Impedance: 16 Ohm
Dynamic Test Input V: 3.5
Sweep Frequency Hz: 350-1200
D.C. Resistance Ohms: 7.3 min/8.6 max
Gap Gauge: .036"

Notes:

If Not Serviceable, Replace With: 2441
Visual Change: Yes
Baffle Modification: No
Exact Acoustic Replacement: Yes

HIGH FREQUENCY DRIVER:

075 (2)
Diaphragm Kit: D8R075
Nom. Impedance: 8 Ohm
Dynamic Test Input V: 7
Sweep Frequency Hz: 1000-3000
D.C. Resistance Ohms: 5.7 min/6.7 max
Gap Gauge: .025"

Notes:

Do not crease diaphragm.
Test with network.
Currently Available.

If Not Serviceable, Replace With:

2402H.
Visual Change: Yes
Baffle Modification: No
Exact Acoustic Replacement: Yes
Additional Parts Currently Available*:
Mounting Gasket: 51795

SYSTEM SPECIFICATIONS:

Nom. Impedance: 8 Ohm
Max Rec. Amp Power: 200 Watts Per Channel
Crossover Frequencies: 500 Hz, 7000 Hz
Sensitivity: 95dB (1 Watt @ 1 Meter)
Enclosure Dim: 35-1/2" x 103-5/8" x 24-1/16" D
902mm x 2632mm x 614mm
Shipping Weight: 698 lbs. - 317 kg.
Additional Parts Currently Available*:
Binding Posts: Red: 10243
Black: 10244

*Other parts may also be available. Check with JBL for details.